


Micro Harmonics

**Superior mm-Wave Components
25-400 GHz**

New! 220-330 GHz Orthomode Transducer

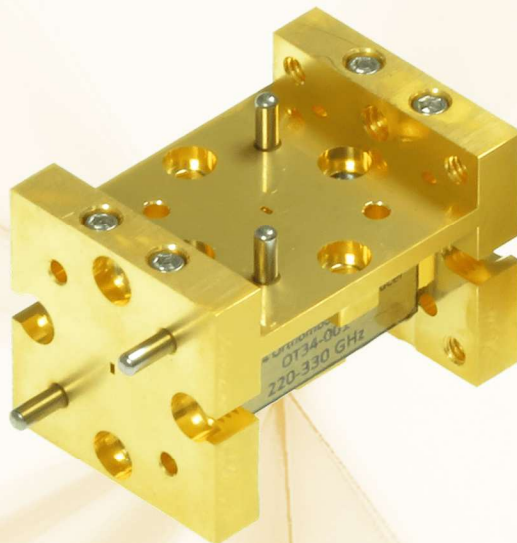

Micro Harmonics Corporation
20 S Roanoke St, Ste 202
Fincastle, VA 24090

Ph: 1+ 540.473.9983
Fax: 1+ 844.449.1561
microharmonics.com

June 2025

Introduction

Micro Harmonics specializes in the design and manufacture of advanced components including Faraday rotation isolators, hybrid circulators, voltage variable attenuators, orthomode transducers, and cryogenic isolators. Our products cover every standard waveguide band from WR-28 (26-40 GHz) through WR-2.8 (260-400 GHz).

Why Choose Micro Harmonics Products?

Our products exhibit state-of-the-art performance in terms of low-insertion loss, broad-bandwidth, and the highest frequency coverage in the industry. We employ unique diamond heatsinks for improved power handling and reliability. Our patented hybrid circulators offer unprecedented bandwidths at mm-wave frequencies. Our compact voltage variable attenuators have a 35 dB dynamic range.

Every component is fully tested on a vector network analyzer to ensure compliance. All parts are thoroughly examined for dimensional tolerance. We do reliability testing (Belcore) and cryogenic cycling tests. We use nylon thread lockers to ensure that our components stay assembled in the field.

Our products are designed and manufactured in the United States. Many of our components were developed under NASA SBIR grants. Because of language in the congressional SBIR authorization, these products can be sole sourced for government acquisitions.


Many companies are engineering our components into their systems and seeing improvements in system performance. Their systems are getting smaller and better. Join the growing number of engineers and scientists across the globe who are using our components to unlock the full potential of their mm-wave and terahertz systems.

- | | |
|----------------------------------|---|
| ◆ Lowest insertion loss | ◆ Extended bandwidth |
| ◆ Comprehensive test data | ◆ Resist stray magnetic fields |
| ◆ Highest power rating | ◆ Lightweight gold-plated aluminum |
| ◆ 25 GHz to 400 GHz | ◆ Compact size |
| ◆ Cryogenic options | ◆ Anti-cocking waveguide flanges |

Guarantee

No two mm-wave components have the same exact frequency response. Unique signatures arise from small misalignments and variations in the internal parts. The differences can be substantial. Max, Min, and typical specs are helpful, but what you need to see are the actual test data for the components you are buying. Micro Harmonics tests every component across the full waveguide band on a vector network analyzer. We supply the test data to the customer at no additional cost. Don't settle for anything less.

Table of Contents

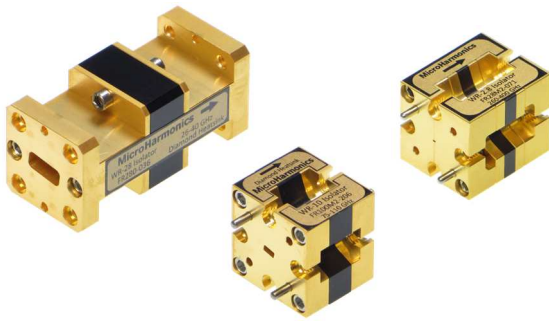


Page 3 - Faraday Rotation Isolators

26-400 GHz
WR-28 through WR-2.8
Full waveguide band

Page 7 - Voltage Variable Attenuators

75-170 GHz
WR-10, WR-8, WR-6.5
Full waveguide band

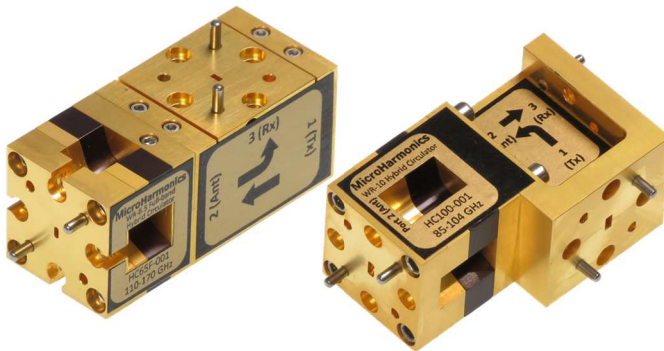

Page 9 - Hybrid Circulators

50-330 GHz
WR-15 through WR-3.4
Broad & Full bandwidths

Page 13 - Orthomode Transducers

50-330 GHz
WR-8, WR-6.5, WR-5.1, WR-3.4
Full waveguide band



Page 15 - Cryogenic Isolators

26-220 GHz
WR-28 through WR-5.1
Full waveguide band

Page 17 - Appendices

Micro Harmonics offers a complete line of Faraday rotation isolators covering 25-400 GHz in every standard waveguide band from WR-28 through WR-2.8. These isolators exhibit state-of-the-art performance in terms of low-insertion loss, broad-bandwidth, low port reflections, and the highest frequency coverage in the industry. They are the most advanced isolators on the market today.


"They had an isolator with the single most important parameter I needed, low insertion loss. They were ultimately able to select one with just 1.2 dB loss at 240 GHz, which is pretty phenomenal."

*Curt Dunnam, Director of Operations
ACERT National Biomedical Center at Cornell*

"The compact size, extremely low insertion loss, and the wide bandwidth have allowed us to use isolators in a wider variety of our systems than was previously possible and have led to significant improvements in key system performance metrics such as source power and sensitivity."

*Jeffrey Hesler, Ph.D.
CTO, Virginia Diodes*

The graph below shows the insertion loss of our isolators as compared to other vendors. The insertion loss of our WR-3.4 isolator is only 2 dB! Don't waste valuable mm-wave signal power by using an isolator with high insertion loss. Join the many companies who are using our isolators in their systems and seeing tangible improvements in system performance.

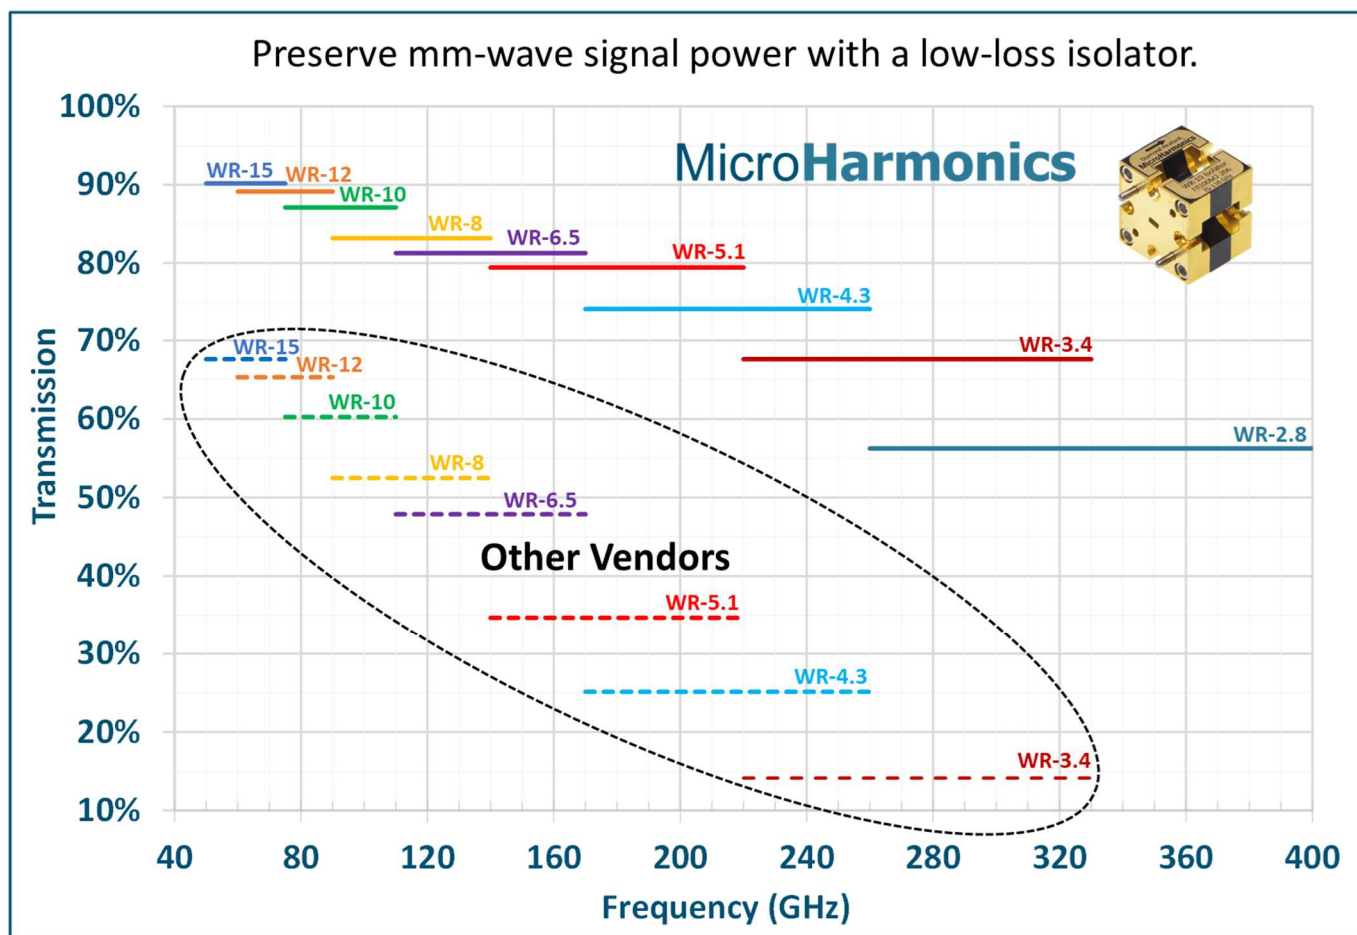

Faraday Rotation Isolators

Model	Flange (EIA)	Band (GHz)	Insertion Loss (dB, avg)	Isolation (dB, typ min)	Max Power† (W)
FR280	WR-28	26 - 40	0.5	23	5.0
FR188	WR-19	40 - 60	0.5	20	4.3
FR148	WR-15	50 - 75	0.6	23	3.8
FR122	WR-12	60 - 90	0.5	20	3.5
FR100	WR-10	75 - 110	0.6	25	2.9
FR090	WR-9	82 - 122	0.9	21	2.7
FR080	WR-8	90 - 140	0.8	24	2.4
FR065	WR-6.5	110 - 170	0.8	25	1.9
FR051	WR-5.1	140 - 220	1.1	22	1.3
FR043	WR-4.3	170 - 260	1.3	22	1.0
FR034	WR-3.4	220 - 330	1.8	23	0.6
FR028	WR-2.8	260 - 400	2.7	21	0.4

† See page 6.







Isolator webpage

A typical specification sheet is shown below. Every component is thoroughly RF tested and the data for each individual component is shared with the customer. Our isolators employ a unique diamond heatsink for improved power handling and reliability. Our isolators are resistant to stray magnetic fields. We use anti-cocking waveguide flanges. All our products are fully guaranteed. We design and manufacture all our products in the United States.


Model: FR065

Specifications

Flange	WR-6.5 UG-387/UM
Frequency (GHz)	110-170
Insertion Loss (dB, avg)	0.8
Insertion Loss (dB, max)	1.8
Isolation (dB, typ min)	25
Input RL (dB, typ min)	16
Output RL (dB, typ min)	17
VSWR (typ max)	1.4:1
Maximum Power (W)	1.9
Diamond Heatsink	Yes
Weight (Oz [g])	0.50 [14]

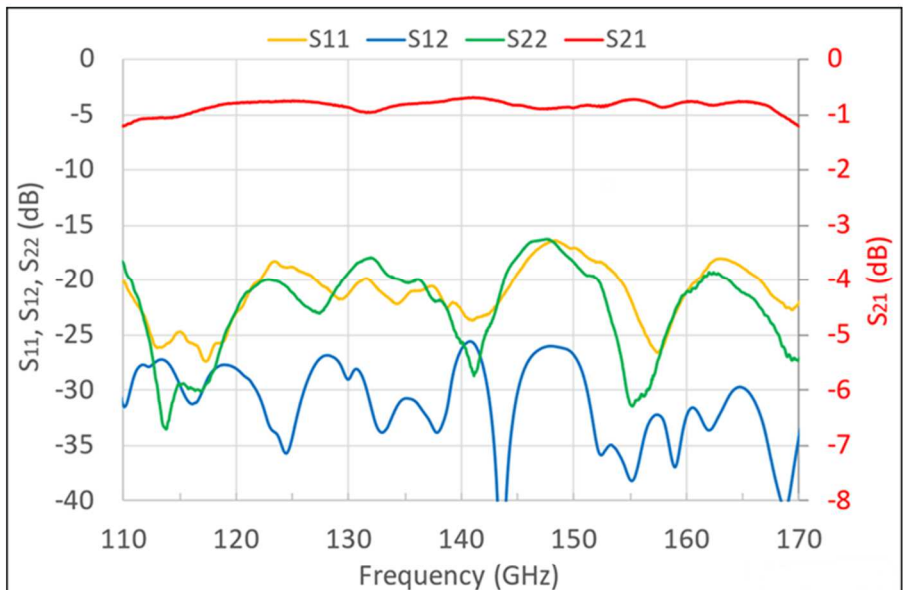

Faraday Rotation Isolators – Sample Test Data

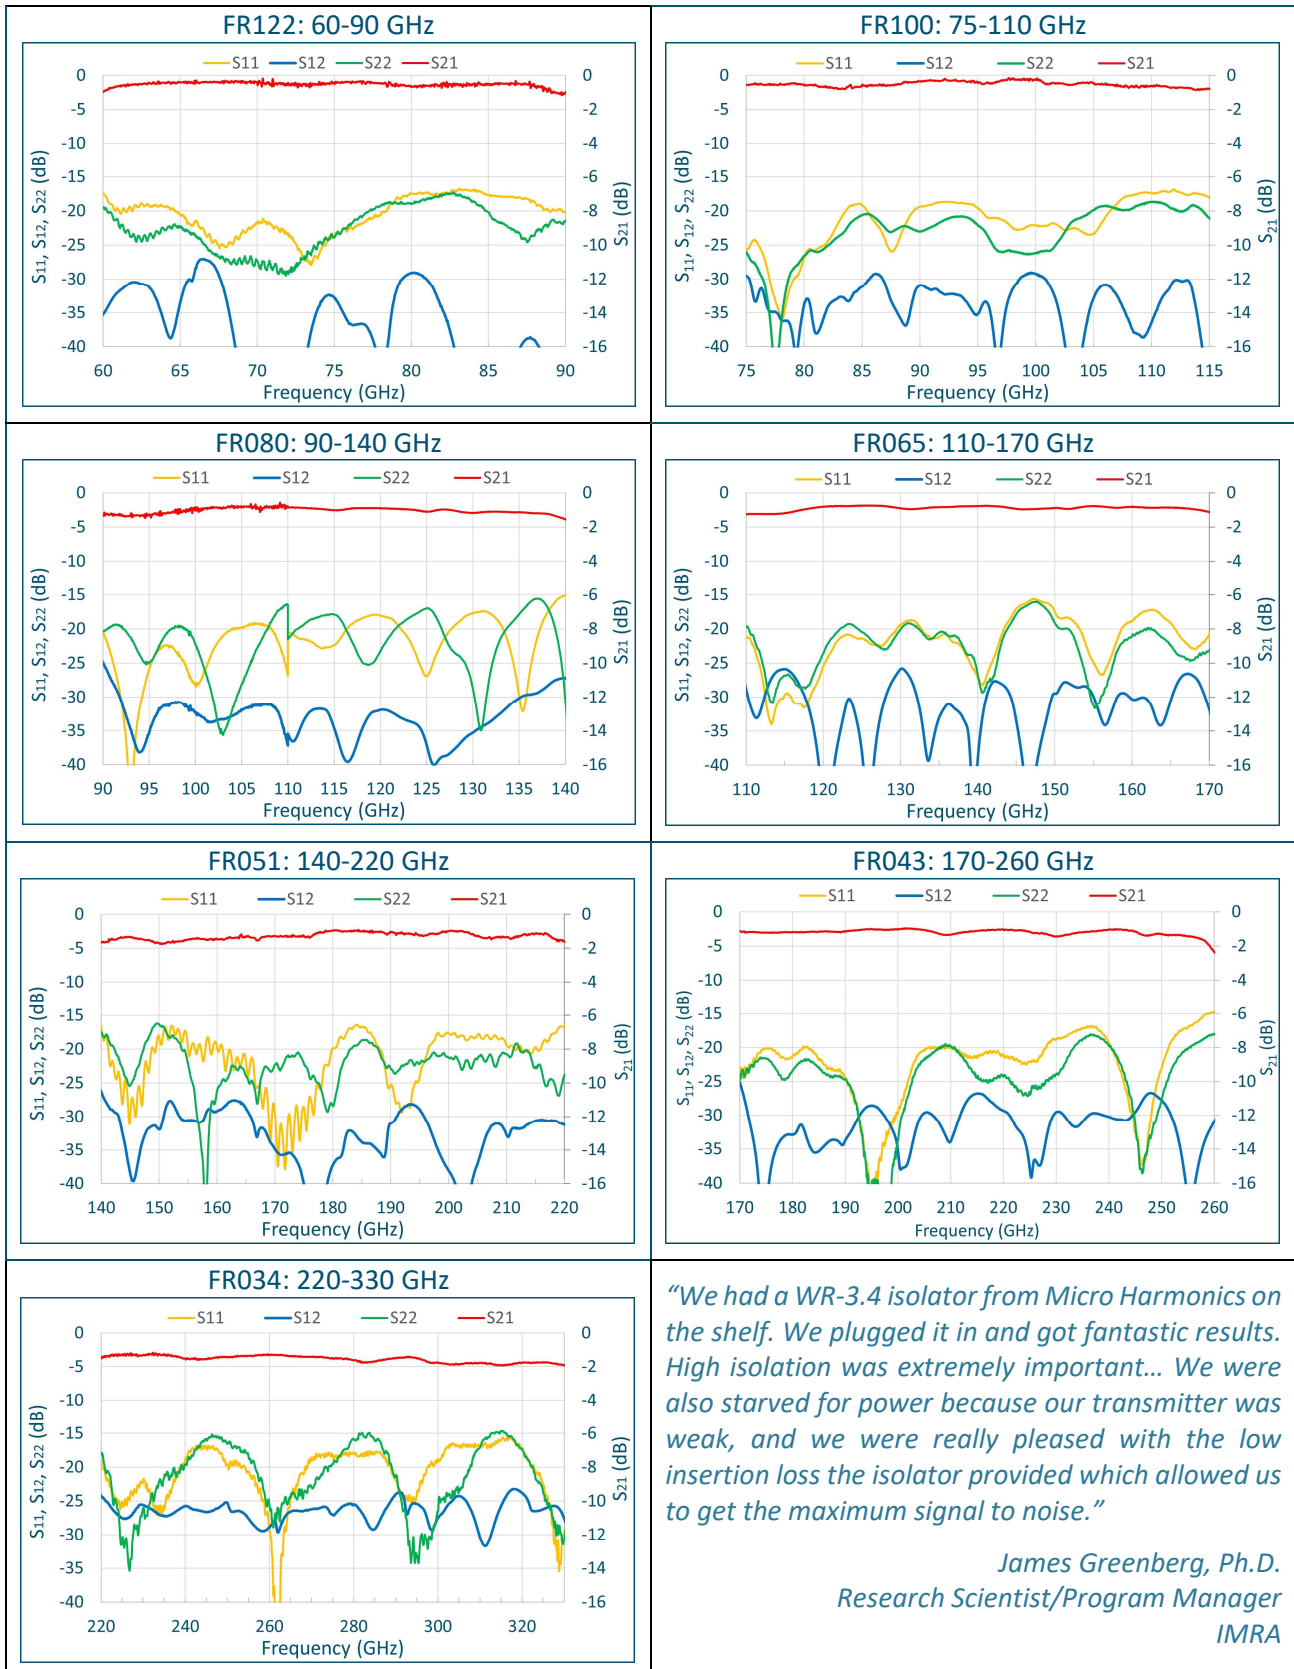


Isolator Power Ratings - In a Faraday rotation isolator, reverse power is absorbed in a resistive layer and converted to heat energy. In the legacy isolators sold by other vendors, the resistive layer can get hot because it is thermally isolated. But Micro Harmonics isolators employ a diamond disc that provides an excellent path to conduct heat from the resistive layer to the metal block.



Micro Harmonics
isolator power
ratings webpage.

The QR code to the left will take you to our power rating webpage where we provide a more in-depth look at our thermal models and how we use them to establish power ratings for our isolators.

The graph below shows the maximum reverse power ratings of our isolators and the average of other vendors. The MHC power ratings are conservative to ensure low temperatures and long life.

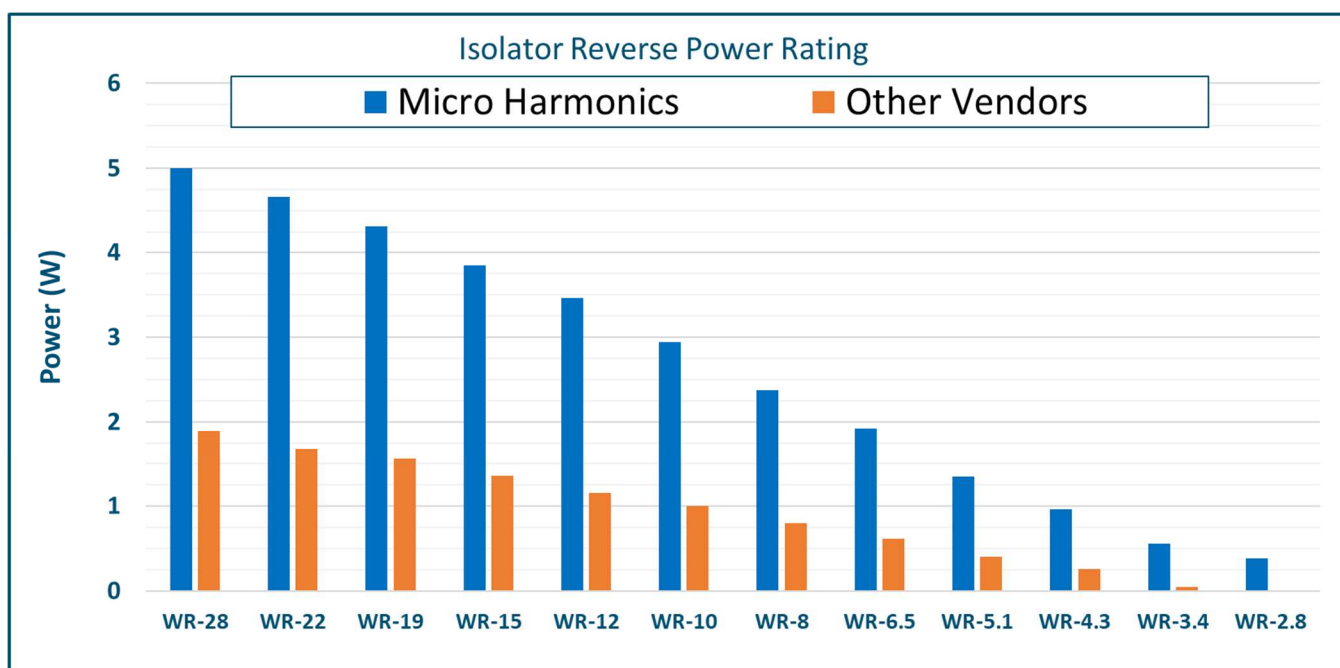


Micro Harmonics Isolators are Insensitive to Stray Magnetic Fields

Have you seen the label on the legacy isolator that warns you to keep it away from magnetic fields? You will not find that label on a Micro Harmonics isolator because our isolators are highly resistant to external magnetic fields. The legacy isolators use a highly tuned magnetic field that is easily perturbed by even a small external magnetic field. This causes under- or over-rotation of the signal and severe performance degradation. Micro Harmonics isolators use a highly saturated magnetic bias field which makes them insensitive to stray magnetic fields. The phenomenon is explained in more detail in an article published in the April 2021 edition of the Microwave Journal.



Microwave Journal
article on stray
magnetic fields.
Microwave Journal

Our attenuators use Faraday rotation in a ferrite rod to rotate an RF signal into a fixed resistive vane. The attenuation level is set using a simple DC voltage in the range from 0 - 9.5 V. They are configured so that maximum attenuation is achieved at 0 V bias. Models are currently available at WR-10, WR-8, and WR-6.5 with additional models planned for every band from WR-15 through WR-3.4. Measured data from our D-band WR-6.5 attenuator is shown below. The dynamic range is more than 35 dB. The WR-6.5 attenuator has a power rating of 1.5 W. Our attenuator has a flatter response, higher return loss, higher power handling, higher dynamic range, and higher frequency coverage than a PIN attenuator.

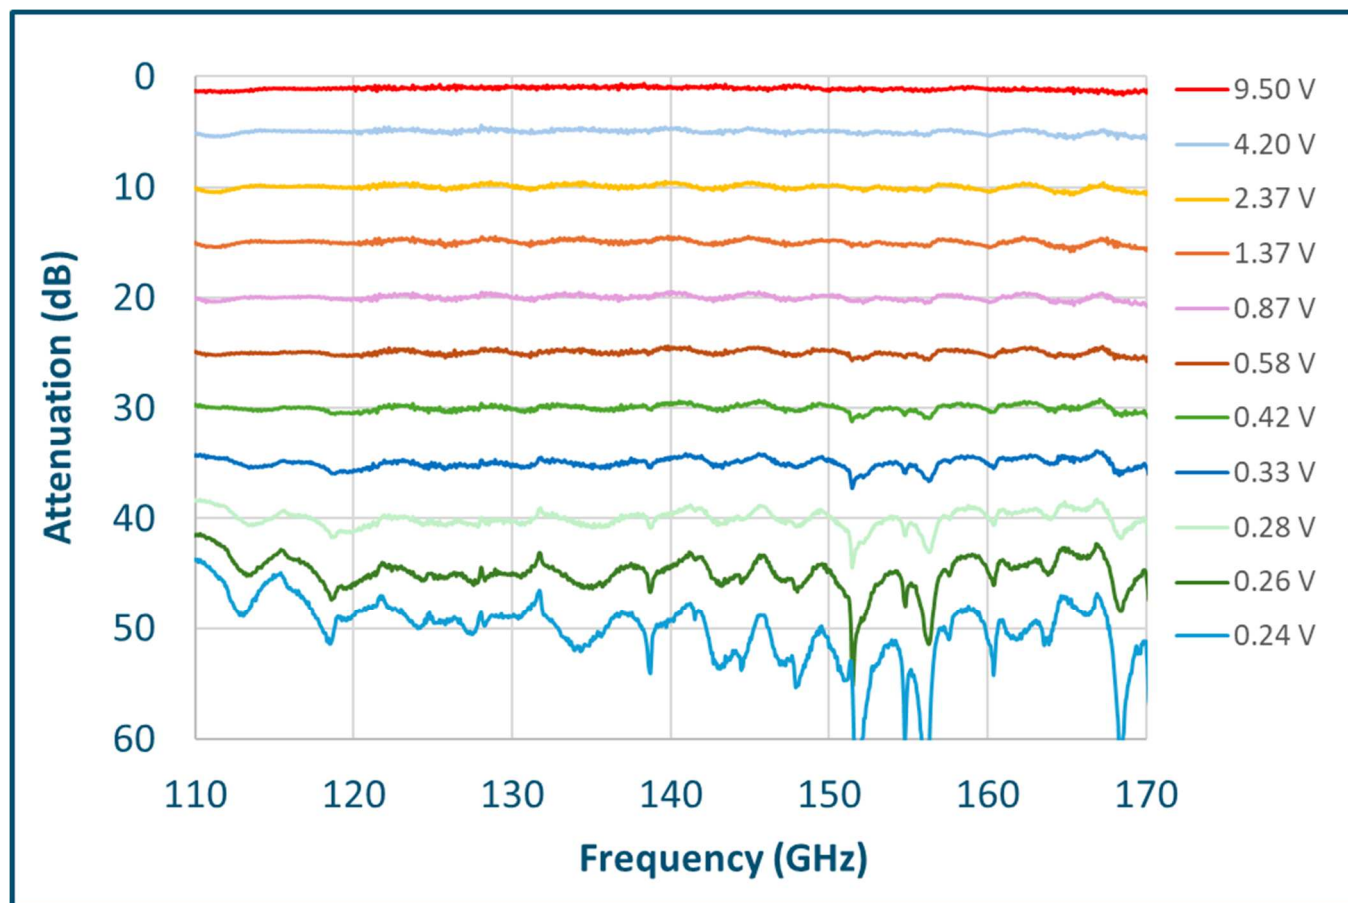


WR-6.5 attenuator

Our WR-6.5 attenuator is shown to the left. The attenuator is lightweight and compact with the main body measuring (0.75 x 0.75 x 1.2 inch) (19 x 19 x 30 mm). The small size makes the attenuator very easy to fit into millimeter-wave systems. A DC control voltage is applied through an SMP (M) connector.



[Attenuator page](#)

An important advantage of the ferrite attenuator is the relatively low port reflections. The graph below shows measured reflections on Port 1 at the various attenuation levels of the WR-6.5 attenuator. The reflections are less than -14 dB across the band for every attenuation level. This compares favorably to the port reflections found on PIN attenuators which can approach -5 dB.

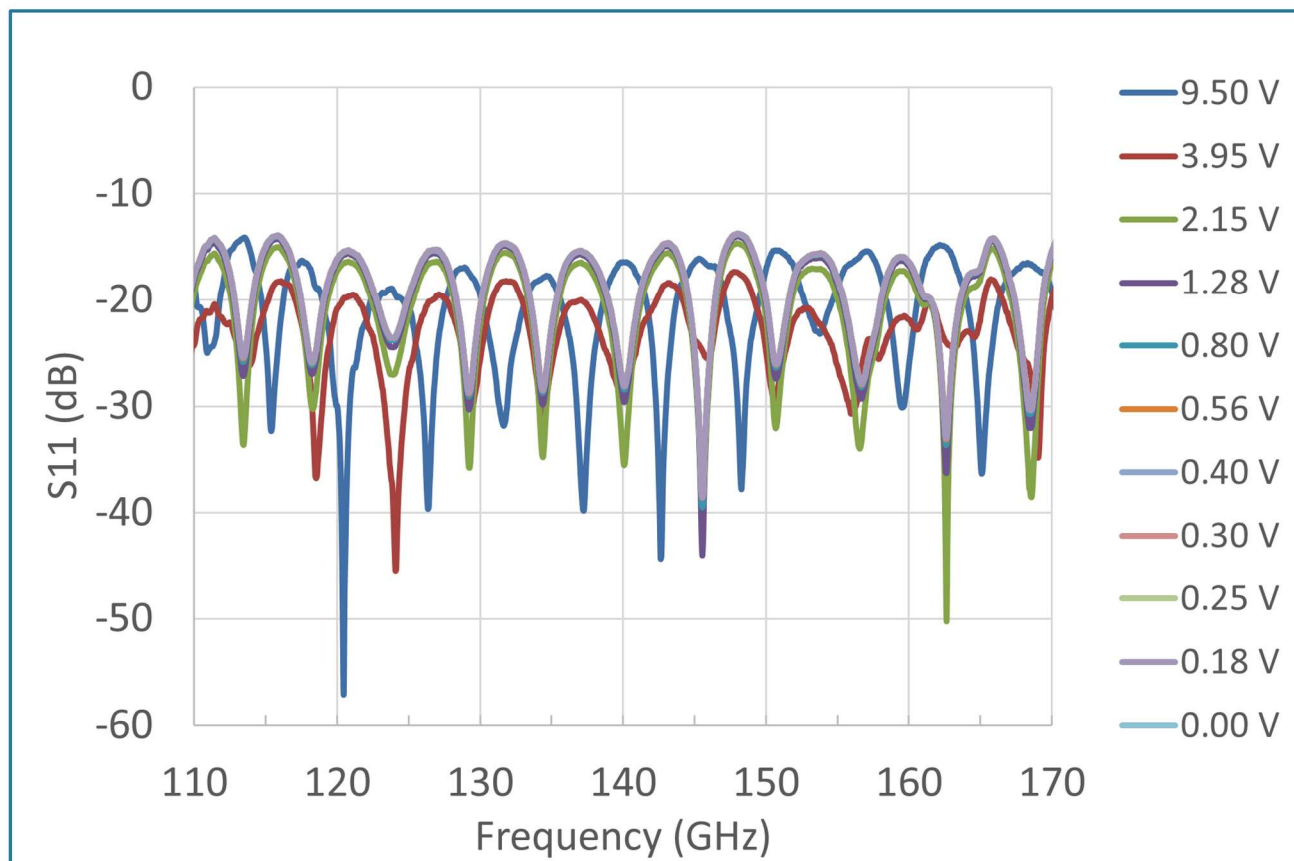

Our ferrite attenuator is compact, lightweight, and has no moving parts. The technology is passive and insensitive to ESD damage. CVD diamond discs are used to channel heat away from the ferrite rods and resistive vanes which enables our ferrite attenuators to handle significantly higher power levels than PIN attenuators. The table below shows a comparison of insertion loss, return loss (port reflections), and maximum power for both our ferrite attenuators and the PIN attenuators offered by other vendors. The comparison is shown for the mm-wave bands from WR-10 through WR-3.4.

Comparison of PIN Diode Attenuators and Ferrite Attenuators.									
Band	Frequency Range (GHz)		Insertion Loss (dB)		Return Loss (dB)		Max Power (W)		
	PIN	Ferrite	PIN	Ferrite	PIN	Ferrite	PIN	Ferrite	
WR-3.4		220-330		2.7		14		0.4	
WR-4.3		170-260		2.5		14		0.7	
WR-5.1		140-220		2.3		14		1.0	
WR-6.5	110-145	110-170	5	2.0	6	14	0.006	1.5	
WR-8	90-140	90-140	4	1.8	6	14	0.006	1.8	
WR-10	75-110	75-110	4	1.5	6	14	0.100	2.3	
Note: Green numbers indicate a substantial advantage for the ferrite attenuator.									




Hybrid
Circulators

Micro Harmonics markets two types of broadband mm-wave hybrid circulators. One type has a 24% fractional bandwidth and is available in every standard waveguide band from WR-15 through WR-3.4 as indicated in the table below. The second type is designed to cover full rectangular waveguide bands having fractional bandwidths in excess of 40%. The first prototype of the full band model was tested in the WR-6.5 band. Additional full band models are planned for development in every band from WR-15 to WR-3.4.


Flange (EIA)		Model Name (24%)	Frequency (GHz)		Model Name (40%)	Frequency (GHz)
WR-15		HC148	54 - 68		HC148F	50 – 75
WR-12		HC122	70 - 86		HC122F	60 – 90
WR-10		HC100	85 - 104		HC100F	75 – 110
WR-8		HC080	107 - 133		HC080F	90 – 140
WR-6.5		HC065	118 - 150		HC065F	110 - 170
WR-5.1		HC051	150 - 190		HC051F	140 - 220
WR-4.3		HC043	196 - 250		HC043F	170 - 260
WR-3.4		HC034	258 - 330		HC034F	220 - 330
Blue: Models currently available. Gold: Models under development.						

Historically, the Y-junction has been the most common type of circulator at mm-wave frequencies. A Y-junction comprises a ferrite core located at the convergence of three waveguides. At the higher mm-wave frequencies, the Y-junction has a narrow bandwidth and is difficult to tune. The theory of operation and architecture of the hybrid circulator are very different from the Y-junction. The hybrid circulator comprises a Faraday rotator and an orthomode transducer (OMT). Since both the Faraday rotator and OMT are inherently broadband, the hybrid circulator is also broadband. A comprehensive technical description is given by D. W. Porterfield, "Broadband Millimeter-Wave Hybrid Circulators," *IEEE Trans. Microw. Theory Techn.*, vol. 71, no. 8, pp. 3501-3507, Aug. 2023. The hybrid circulator technology is patented. Please visit our website for more information.




The bar chart below shows fractional bandwidths for the hybrid circulators and Y-junction circulators. The bandwidth of the Y-junction circulator steadily drops as the frequency increases, approaching only 2% at 160 GHz. We define the 20 dB bandwidth as the band over which the isolation between circulator ports is more than 20 dB.

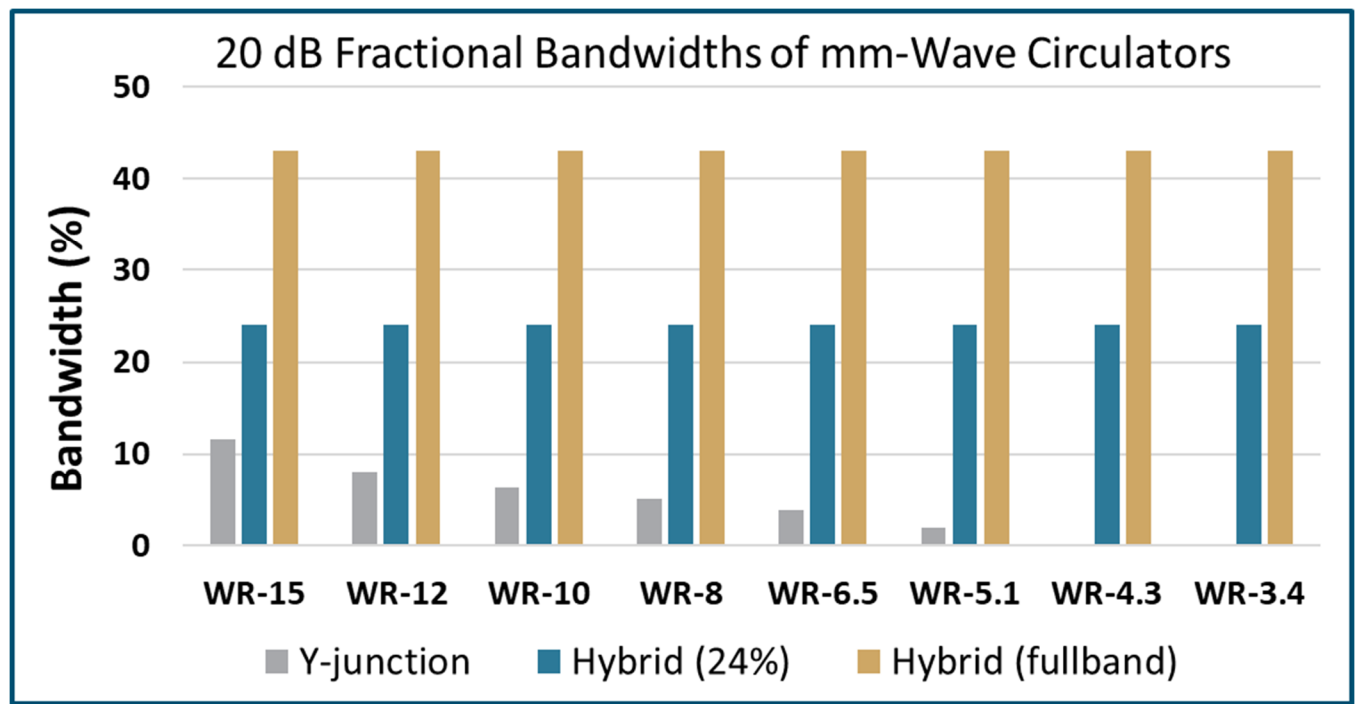



RF test data from one of our WR-5.1 hybrid circulators are shown in the lower graph along with test data from a Y-junction circulator for comparison. This hybrid model is designed for 24% bandwidth. Insertion loss of our WR-5.1 hybrid circulator is less than 2.2 dB.

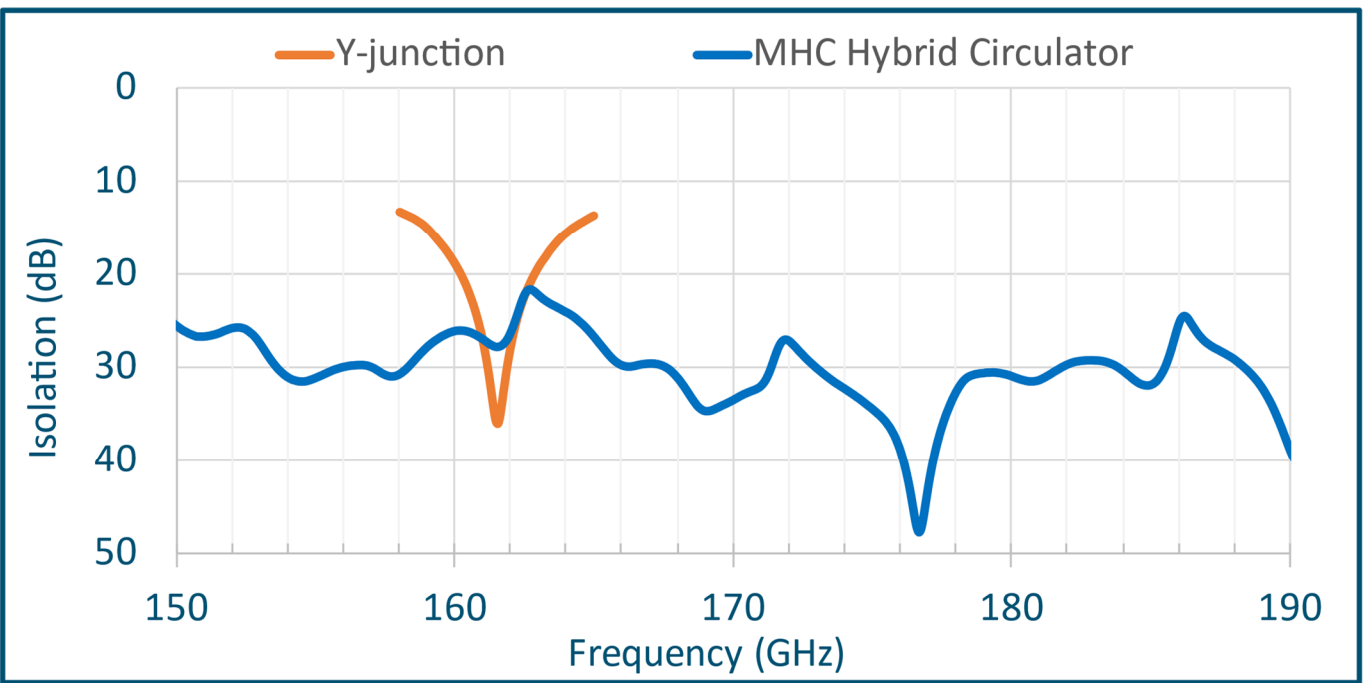

Measured RF test data for the full band WR-6.5 hybrid circulator are shown in the graph below. Isolation is greater than 20 dB. Return loss is greater than 15 dB. Insertion loss is less than 1.5 dB across most of the band. This level of performance has never been achieved before in a D band circulator.

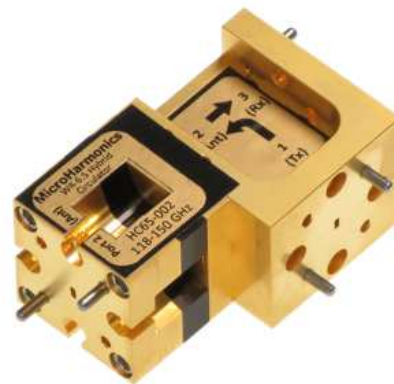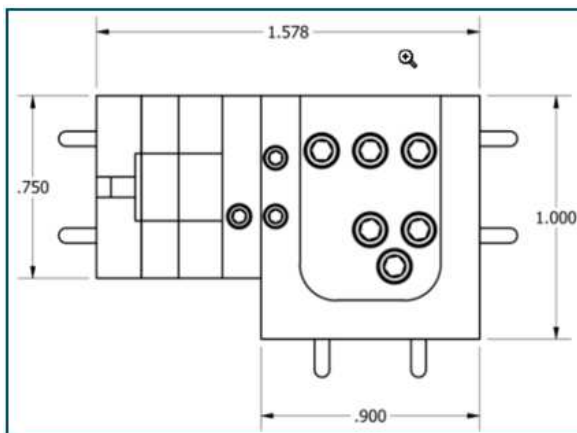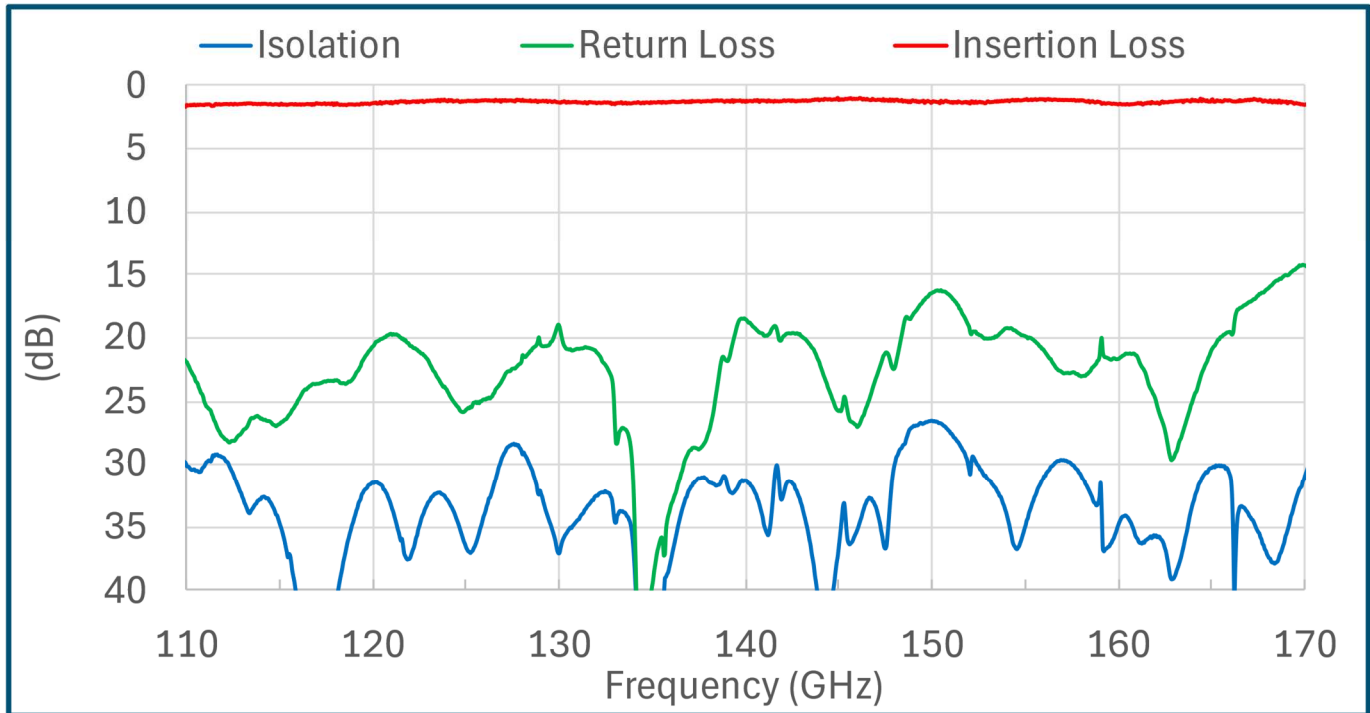

**HC065
WR-6.5
(24%)**

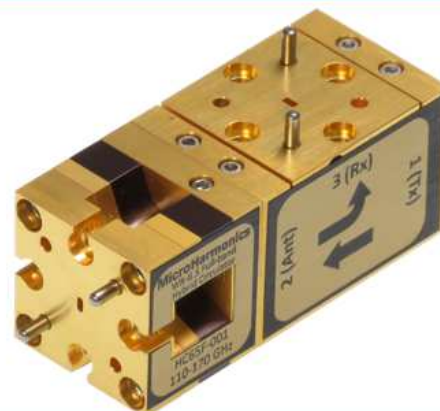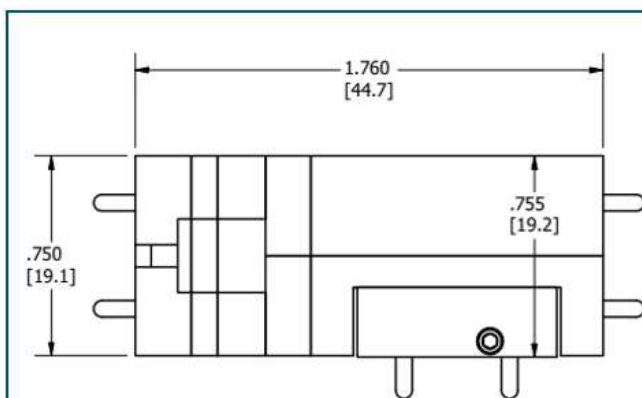


**HC065F
WR-6.5
(> 40%)**


High Isolation Hybrid Circulators

In high-power transceiver systems, the sensitive receiver (Rx) must be isolated from the high-power transmitter (Tx) signal. The 20 dB isolation provided by Y-junction circulators is insufficient. Circulators employing multiple Y-junctions can achieve some increased isolation parameters, but the isolation of the receiver from the transmitter signal cannot be increased by using multiple junctions.

To understand why, consider the schematic for a triple junction circulator. The three circulators are designated “A”, “B”, and “C”. Circulators “A” and “C” function as isolators since their third ports are terminated with matched loads. A single isolation path on circulator “B”, $|S_{31}|$, blocks the transmit signal from reaching the receiver. Regardless of how many junctions are used, a multi-Y-junction circulator can only have a single isolation path protecting the receiver (Rx) from the transmitter (Tx).

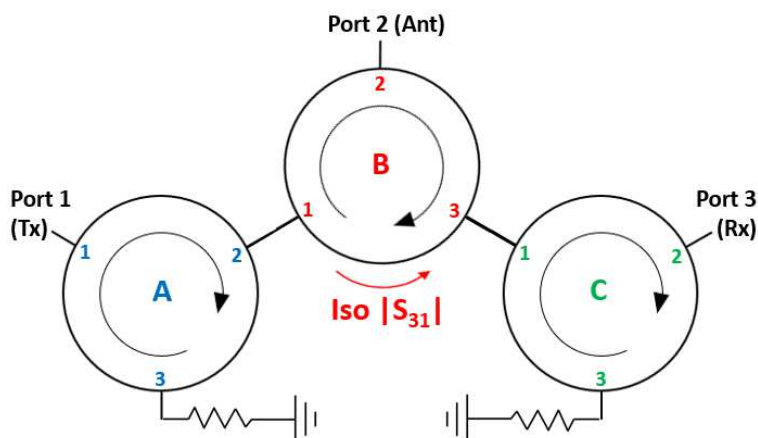

But Micro Harmonics unique hybrid circulators can be designed to achieve high S_{31} isolation over broad bandwidths. HFSS simulation data are shown below for a hybrid circulator with S_{31} isolation of more than 40 dB over the band 157-162 GHz. Measured data from a Y-junction are shown for comparison. High isolation hybrid circulators can be designed up to 330 GHz. The hybrid circulator technology is patented and only available from Micro Harmonics. Please contact us for more information.

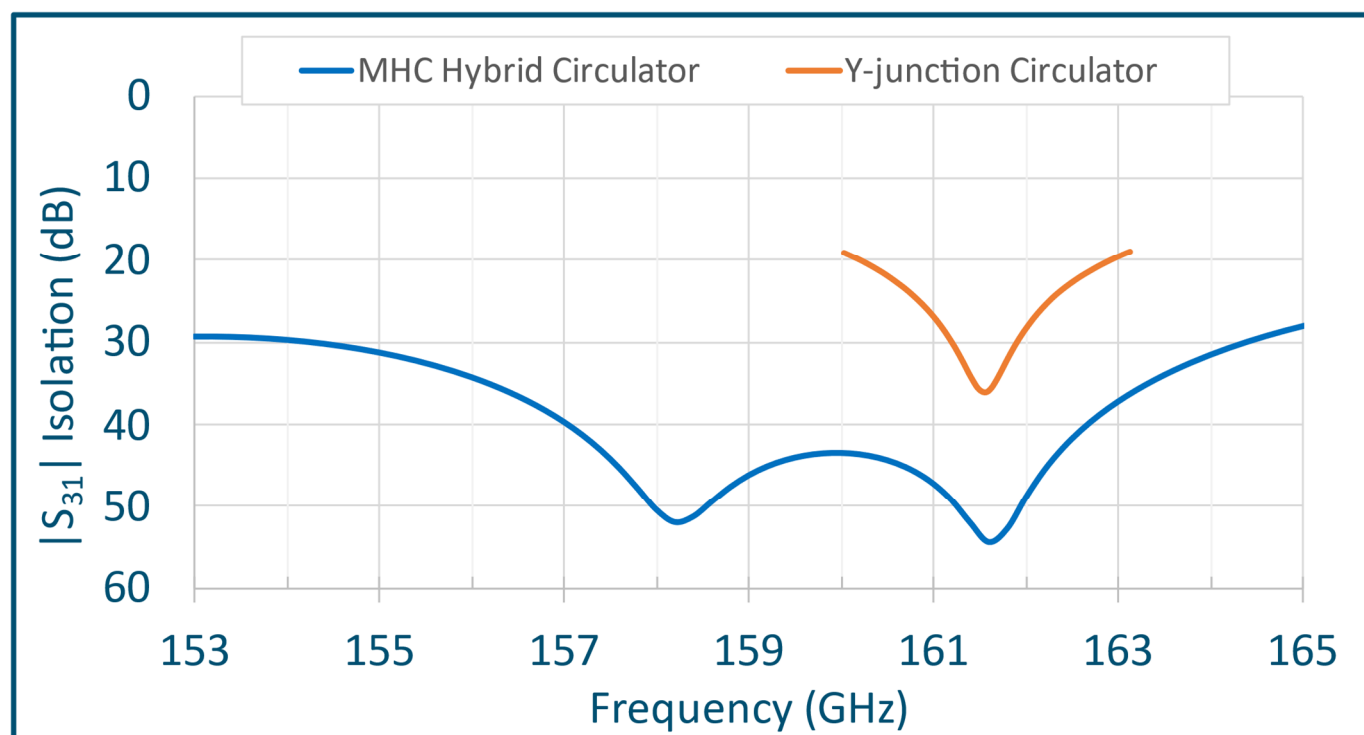


Our orthomode transducers (OMTs) cover full waveguide bands. They have low insertion loss, low cross-polarization coupling, and high isolation. OMTs are now available in WR-8, WR-6.5, WR-5.1, and WR-3.4. Additional OMTs are in various stages of development as indicated in the table.

Band	Frequency (GHz)	Status
WR-15	50-75	Under development
WR-12	60-90	Under development
WR-10	75-110	Under development
WR-8	90-140	Available for purchase
WR-6.5	110-170	Available for purchase
WR-5.1	140-220	Available for purchase
WR-4.3	170-260	Under development
WR-3.4	220-330	Available for purchase
WR-2.8	280-400	Future R&D effort
WR-2.2	330-500	Future R&D effort




OMTs

The graph below shows measured data from our WR-6.5 OMT. The orange and green traces show insertion loss at less than 0.4 dB across the band. The blue trace shows cross-polarization coupling between the single mode ports and the opposite polarity in the common mode port is less than -60 dB.

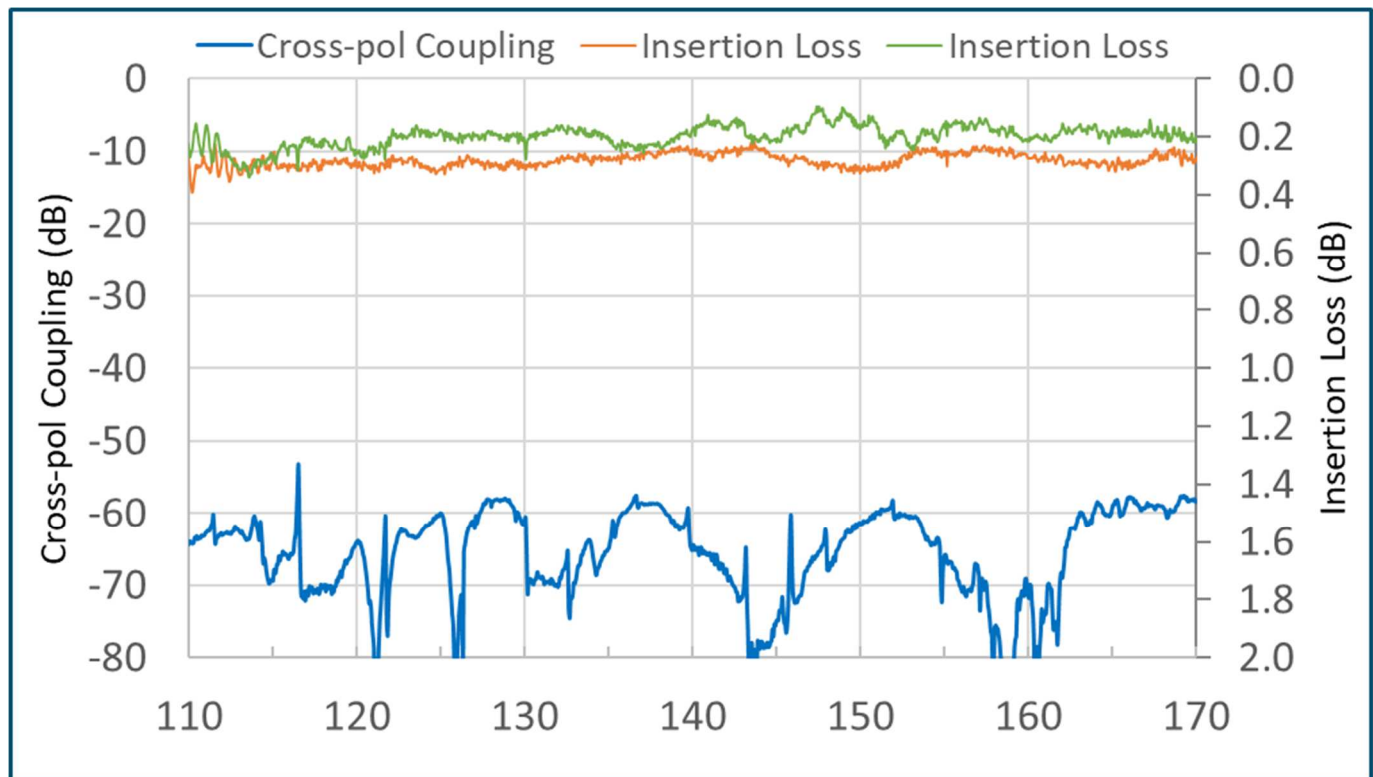

The graph below shows measured RF test data from our WR-3.4 OMT. Insertion loss is less than 0.8 dB across the band 220-330 GHz. The cross-polarization coupling is less than -38 dB. (We show the cross-pol coupling as a positive value to fit on the graph.) Isolation is at the 50 dB level. The noise in the isolation data is a remnant of the RF test procedure and related to the quality of the matched load on the common port. The return loss is greater than 18 dB.

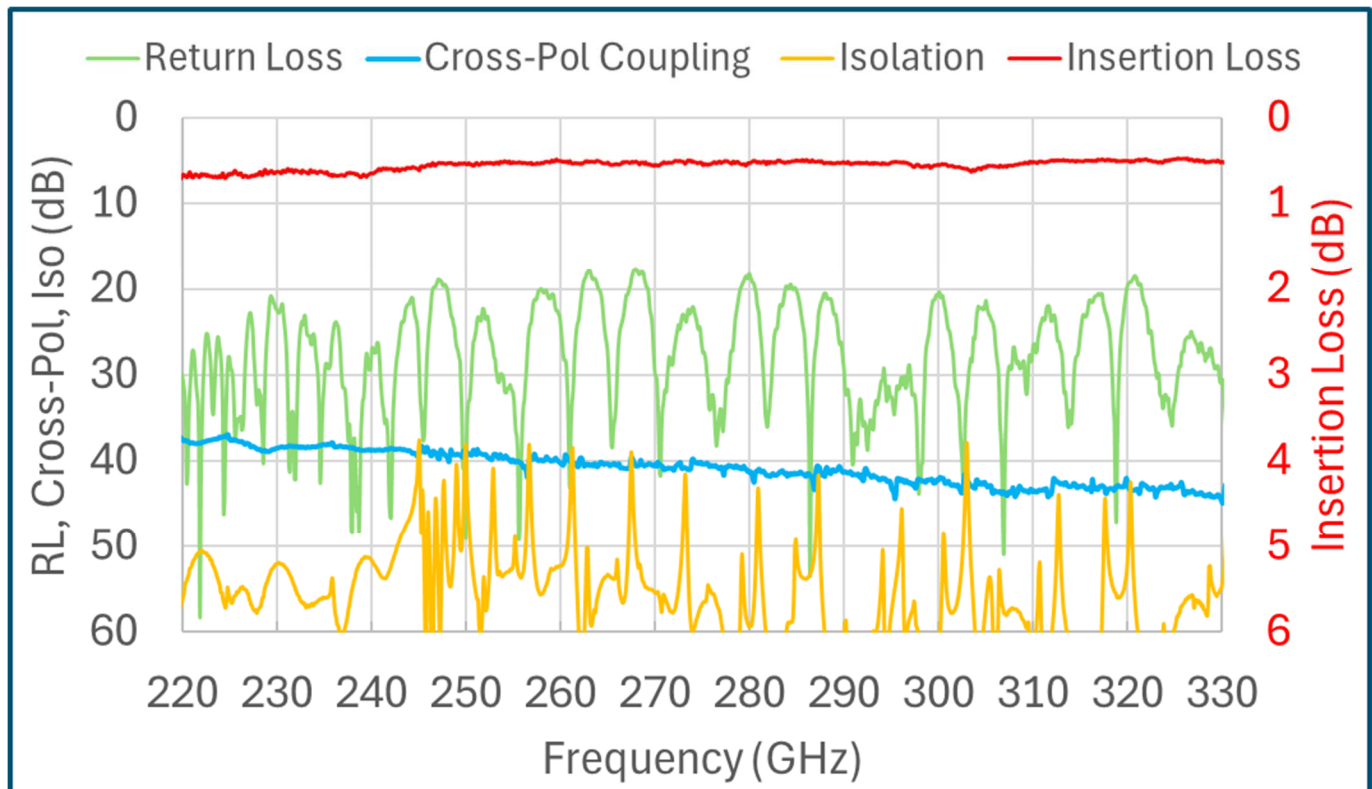

Y-junction Circulators

At Micro Harmonics, the Y-junction circulator is being replaced by our patented broadband hybrid circulator (see pages 9-12). But for some narrow bandwidth applications, we continue to offer a line of Y-junction circulators covering sub-bands within the WR-15, WR-12, WR-10, and WR-8 bands (50-140 GHz). These circulators exhibit state-of-the-art performance in terms of high isolation, low-insertion loss, and low port reflections. Check our website for stock models. Special order designs optimized for specific sub-bands are considered on a case-by-case basis.



Y-junction circulators

It is a common misconception that isolators designed to work at room temperature will work reasonably well at cryogenic temperatures. The problem is that the ferrite materials have a strong temperature dependence that impacts signal rotation. This can cause significant over-rotation of the signal and severely degrade performance at cryogenic temperatures.

"We can get down to less than 100 Kelvins with commercially available cryo-coolers...Our biggest challenge was finding an isolator that could perform at those temps. Fortunately for us, a company called Micro Harmonics had just designed some specifically for NASA."

*Dana Wheeler, President
Aerowave, Inc.*

At Micro Harmonics we have developed a line of isolators designed for optimal performance at cryogenic temperatures. The ferrite is biased in magnetic saturation for minimal insertion loss, and the length of the ferrite rod is optimized to achieve the desired rotation at cryogenic temperatures.

Sophisticated models are constructed to simulate the thermal stress levels throughout the isolator as it is cooled. Materials are chosen to reduce thermal stress. Reliability is verified through repeated thermal cycling in a liquid nitrogen bath. Our isolators are built to withstand the rigors of repeated cryogenic cycling.

Our cryogenic isolators are routinely tested at 25 K in our cryostat. We use a resistive thin film for isolation that is not in the class of super conductors. The performance has been independently verified down to 1 K by researchers at the University of Chicago and at the Smithsonian Astrophysical Observatory.

Eight models of the cryogenic isolator are now available as indicated in the Table below. These models cover most frequencies from 26 GHz to 220 GHz. Models at WR-4.3 and WR-3.4 will be added pending customer demand.





Cryogenic Isolators

Model	Flange	Band (GHz)	Insertion Loss (dB, typ @ 25 K)	Isolation (dB, typ @ 25 K)
FR280C	WR-28	26 - 40	0.5	25
FR148C	WR-15	50 - 75	0.5	28
FR122C	WR-12	60 - 90	0.7	25
FR100C	WR-10	75 - 110	0.5	30
FR090C	WR-9	82 - 122	0.5	30
FR080C	WR-8	90 - 140	0.7	27
FR065C	WR-6.5	110 - 170	0.9	23
FR051C	WR-5.1	140 - 220	1.2	23

Cryogenic Isolators



Model: FR280C

Specifications	
Flange	WR-28 UG-599/U
Frequency (GHz)	26.5-40
Insertion Loss (dB, avg)	
@ 25K	0.6
@ Room Temperature	0.5
Isolation (dB, typ min)	
@ 25K	24
@ Room Temperature	19
Input RL (dB, typ min)	17
Output RL (dB, typ min)	17
VSWR (typ max)	1.35:1
Maximum Power (W)	1.2

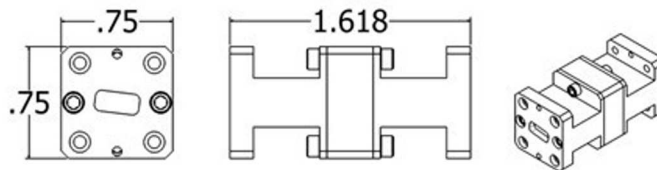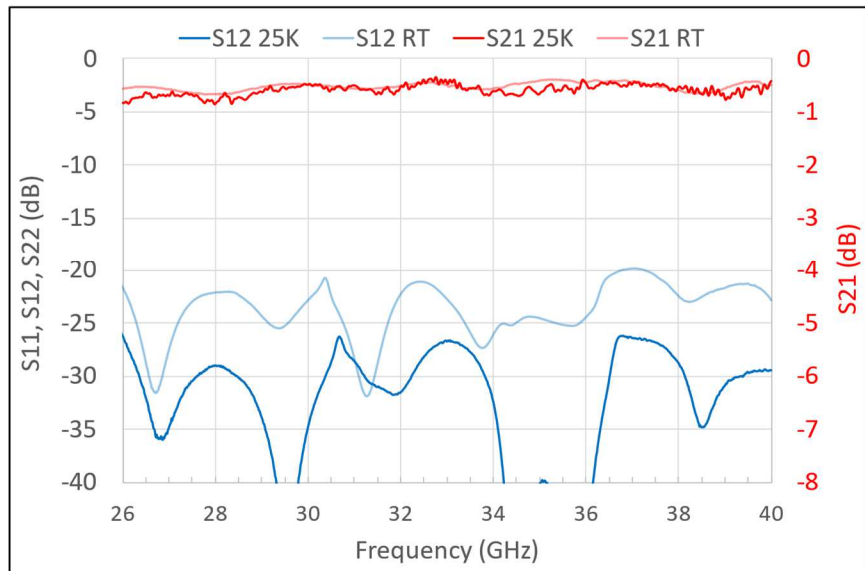


Model: FR100C

Specifications	
Flange	WR-10 UG387/UM
Frequency (GHz)	75-110
Insertion Loss (dB, avg)	
@ 25K	0.5
@ Room Temperature	0.6
Isolation (dB, typ min)	
@ 25K	24
@ Room Temperature	17
Input RL (dB, typ min)	18
Output RL (dB, typ min)	18
VSWR (typ max)	1.3:1
Maximum Power (W)	1.0

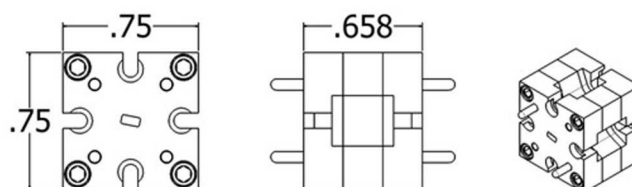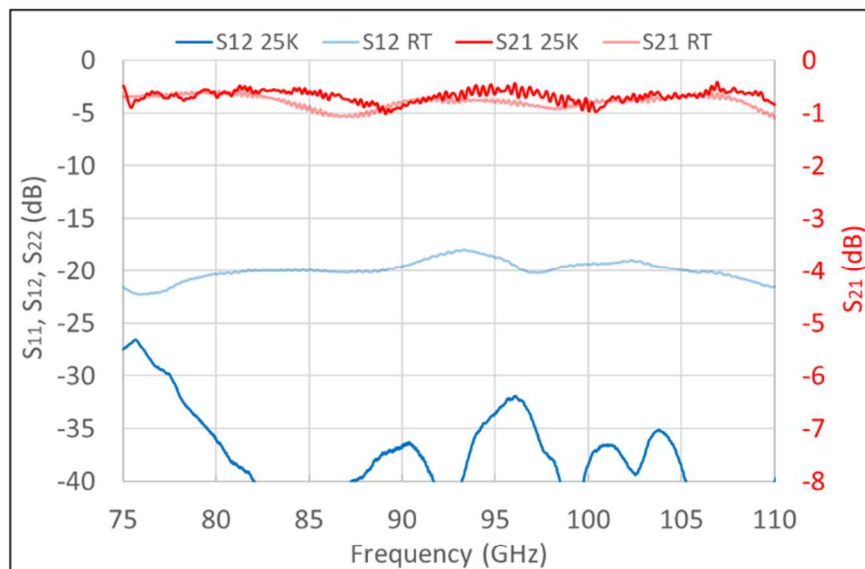


Insertion Loss –vs- Transmission Conversion Table

IL (dB)	T (%)	IL (dB)	T (%)	IL (dB)	T (%)	IL (dB)	T (%)	IL (dB)	T (%)	IL (dB)	T (%)
0.0	100.00	2.0	63.10	4.0	39.81	6.0	25.12	8.0	15.85	10.0	10.00
0.1	97.72	2.1	61.66	4.1	38.90	6.1	24.55	8.1	15.49	10.1	9.77
0.2	95.50	2.2	60.26	4.2	38.02	6.2	23.99	8.2	15.14	10.2	9.55
0.3	93.33	2.3	58.88	4.3	37.15	6.3	23.44	8.3	14.79	10.3	9.33
0.4	91.20	2.4	57.54	4.4	36.31	6.4	22.91	8.4	14.45	10.4	9.12
0.5	89.13	2.5	56.23	4.5	35.48	6.5	22.39	8.5	14.13	10.5	8.91
0.6	87.10	2.6	54.95	4.6	34.67	6.6	21.88	8.6	13.80	10.6	8.71
0.7	85.11	2.7	53.70	4.7	33.88	6.7	21.38	8.7	13.49	10.7	8.51
0.8	83.18	2.8	52.48	4.8	33.11	6.8	20.89	8.8	13.18	10.8	8.32
0.9	81.28	2.9	51.29	4.9	32.36	6.9	20.42	8.9	12.88	10.9	8.13
1.0	79.43	3.0	50.12	5.0	31.62	7.0	19.95	9.0	12.59		
1.1	77.62	3.1	48.98	5.1	30.90	7.1	19.50	9.1	12.30	0	100
1.2	75.86	3.2	47.86	5.2	30.20	7.2	19.05	9.2	12.02	10	10
1.3	74.13	3.3	46.77	5.3	29.51	7.3	18.62	9.3	11.75	20	1
1.4	72.44	3.4	45.71	5.4	28.84	7.4	18.20	9.4	11.48	30	0.1
1.5	70.79	3.5	44.67	5.5	28.18	7.5	17.78	9.5	11.22	40	0.01
1.6	69.18	3.6	43.65	5.6	27.54	7.6	17.38	9.6	10.96	50	0.001
1.7	67.61	3.7	42.66	5.7	26.92	7.7	16.98	9.7	10.72	60	0.0001
1.8	66.07	3.8	41.69	5.8	26.30	7.8	16.60	9.8	10.47	70	0.00001
1.9	64.57	3.9	40.74	5.9	25.70	7.9	16.22	9.9	10.23	80	0.000001

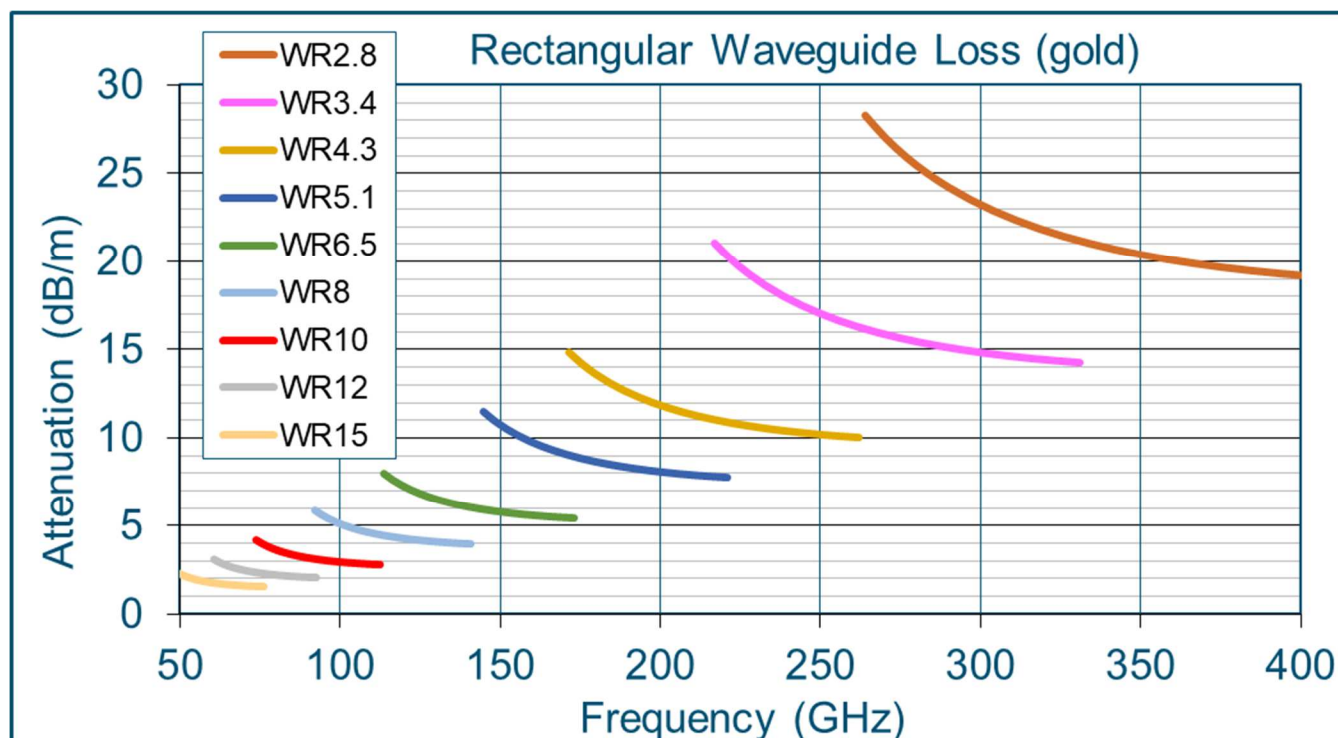


Anti-Cocking Round Waveguide Flanges

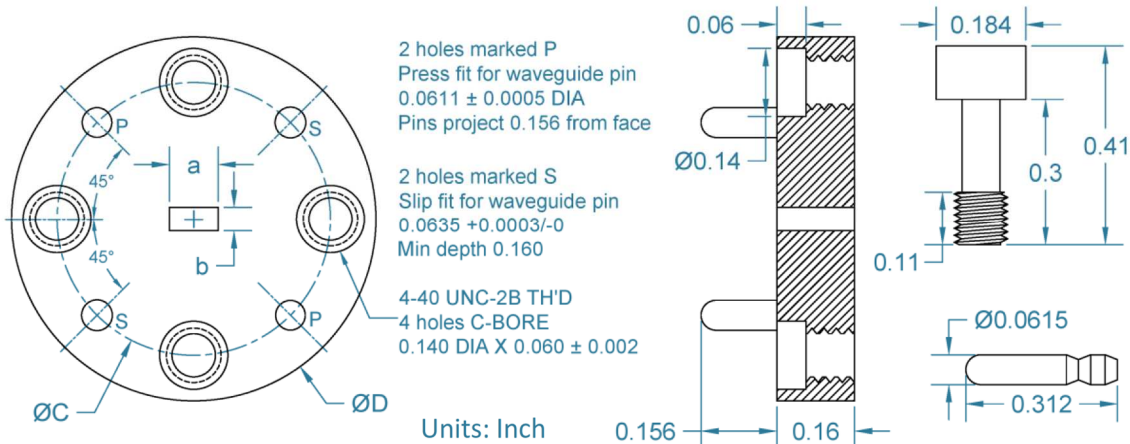


WR-	22	19	15	12	10	8	6.5	5.1	4.3	3.4	2.8
GHz	33 50	40 60	50 75	60 90	75 110	90 140	110 170	140 220	170 260	220 330	260 400
a	.224	.188	.148	.122	.100	.080	.065	.051	.043	.034	.028
b	.122	.094	.074	.061	.050	.040	.0325	.0255	.0215	.017	.014
φC	.9375		.5625								
φD	1.125		.750								

Square Waveguide Flanges

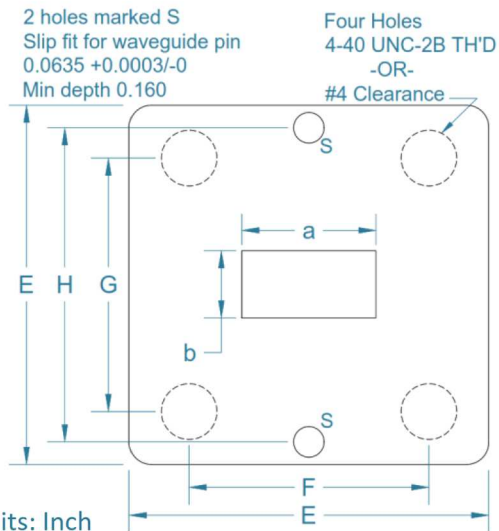

WR	a	b	E	F	G	H
42	.420	.170	.875	.640	.670	.7500
28	.280	.140				
22	.224	.122	.750	.500	.530	.6562
19	.188	.094				


Cap-Head Screws

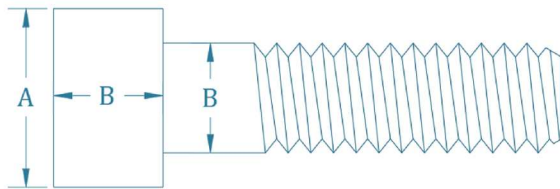

Size	Thread /inch	Head Dia. A	Body Dia. B	Tap Drill	Counter bore (inch)	Clearance Hole Close/Free
#0	80	.096	.060	3/64	1/8	.0635/.070
#1	72	.118	.073	#53	5/32	.076/.081
#2	56	.140	.086	#50	3/16	.089/.096
#4	40	.183	.112	#43	7/32	.116/.1285
#6	32	.226	.138	#36	9/32	.114/.1495
#8	32	.270	.164	#29	5/16	.1695/.177
#10	24	.312	.190	#25	3/8	.196/.201
1/4	20	.375	.250	#7	7/16	.257/.266

Rectangular Waveguide Chart

EIA WR- (##)	RCSC WG- (##)	IEEE WM- (####)	Band	Internal Dimension (mil)	Standard Frequency (GHz)	fc TE10 (GHz)	fc TE20 (GHz)	UG- (###/#)
42	20		K	420 x 170	17.5 - 26.5	14.1	28.2	
34	21			340 x 170	22.0 - 33.0	17.4	34.8	
28	22		Ka	280 x 140	26.5 - 40.0	21.1	42.2	599/U
22	23		Q	224 x 112	33.0 - 50.5	26.3	52.6	383/U
19	24		U	188 x 94	40.0 - 60.0	31.4	62.8	383/UM
15	25		V	148 x 74	50.5 - 75.0	39.9	79.8	385/U
12	26		E	122 x 61	60 - 90	48.4	96.8	387/U
10	27	2540	W	100 x 50	75 - 110	59	118	387/UM
8	28	2032	F	80 x 40	90 - 140	73.8	147.6	387/UM
6.5	29	1651	D	65 x 32.5	110 - 170	90.8	181.6	387/UM
5.1	30	1295	G	51 x 25.5	140 - 220	116	232	387/UM
4.3	31	1092	Y	43 x 21.5	170 - 260	137	274	387/UM
3.4	32	864	J	34 x 17	220 - 330	174	348	387/UM
2.8		710		28 x 14	260 - 400	211	422	387/UM
2.2		570		22 x 11	325 - 500	268	536	387/UM
1.9		470		19 x 9.5	400 - 600	311	622	387/UM
1.5		380		15 x 7.5	500 - 750	393	786	387/UM
1.2		310		12 x 6	600 - 900	492	984	387/UM
1.0		250		10 x 5	750 - 1100	590	1180	n/a
0.8		200		8 x 4	900 - 1400	738	1476	n/a
0.65		164		6.5 x 3.25	1100 - 1700	908	1816	n/a
0.51		130		5.1 x 2.55	1400 - 2200	1157	2314	n/a

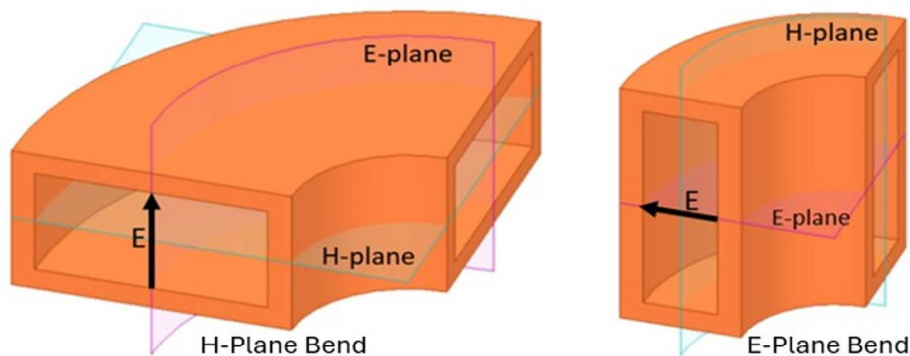

VSWR/|Γ|/RL

VSWR	Γ	RL (dB)
1.065	0.0316	30
1.074	0.0355	29
1.083	0.0398	28
1.094	0.0447	27
1.1	0.0476	26.444
1.106	0.0501	26
1.119	0.0562	25
1.135	0.0631	24
1.152	0.0708	23
1.173	0.0794	22
1.196	0.0891	21
1.2	0.0909	20.828
1.222	0.1	20
1.253	0.1122	19
1.288	0.1259	18
1.3	0.1304	17.692
1.329	0.1413	17
1.377	0.1585	16
1.4	0.1667	15.563
1.433	0.1778	15
1.499	0.1995	14
1.5	0.2	13.979
1.577	0.2239	13
1.6	0.2308	12.736
1.671	0.2512	12
1.7	0.2593	11.725
1.785	0.2818	11
1.8	0.2857	10.881
1.9	0.3103	10.163
1.925	0.3162	10

$$VSWR = \frac{1 + |\Gamma|}{1 - |\Gamma|}$$

$$RL = -20 \log |\Gamma|$$



Isolators



Circulators



Attenuators



OMTs



Blog



News



Newsletter



MHC Home