


FR188-599

WR-19 waveguide isolator



- ◆ Anti-cocking waveguide flanges
- ◆ Comprehensive test data
- ◆ Lowest insertion loss
- ◆ High isolation
- ◆ Compact size
- ◆ Diamond heatsinks
- ◆ Resist stray magnetic fields
- ◆ Internal waveguide screw access

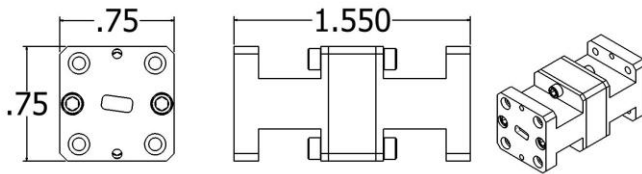

Specifications

Flange†	WR-19 UG-599/U†
Frequency (GHz)	40-60
Insertion Loss (dB, avg)	0.5
Insertion Loss (dB, max)	1.3
Isolation (dB, typ min)	25
Input RL (dB, typ min)	19
Output RL (dB, typ min)	19
VSWR (typ max)	1.25:1
Max Reverse Power (W)	3.4
Diamond Heatsink	Yes

Test data measured and synthesized using WR-28 and WR-15 extenders with tapers
 †Outfitted with non-standard 599/U flange

Every isolator is tested on a vector network analyzer to verify performance and the test data is provided.

