

FR065


WR-6.5 waveguide isolator



MicroHarmonics

Superior mm-Wave Components


- ◆ Anti-cocking waveguide flanges
- ◆ Comprehensive test data
- ◆ Lowest insertion loss
- ◆ High isolation
- ◆ Compact size
- ◆ Diamond heatsinks
- ◆ Resist stray magnetic fields
- ◆ Internal waveguide screw access



Specifications

Flange	WR-6.5 UG-387/UM
Frequency (GHz)	110-170
Insertion Loss (dB, avg)	0.8
Insertion Loss (dB, max)	1.8
Isolation (dB, typ min)	25
Input RL (dB, typ min)	16
Output RL (dB, typ min)	17
VSWR (typ max)	1.4:1
Max Reverse Power (W)	1.9
Diamond Heatsink	Yes
Weight (Oz [g])	0.50 [14]

Every isolator is tested on a vector network analyzer to verify performance, and the test data is provided.

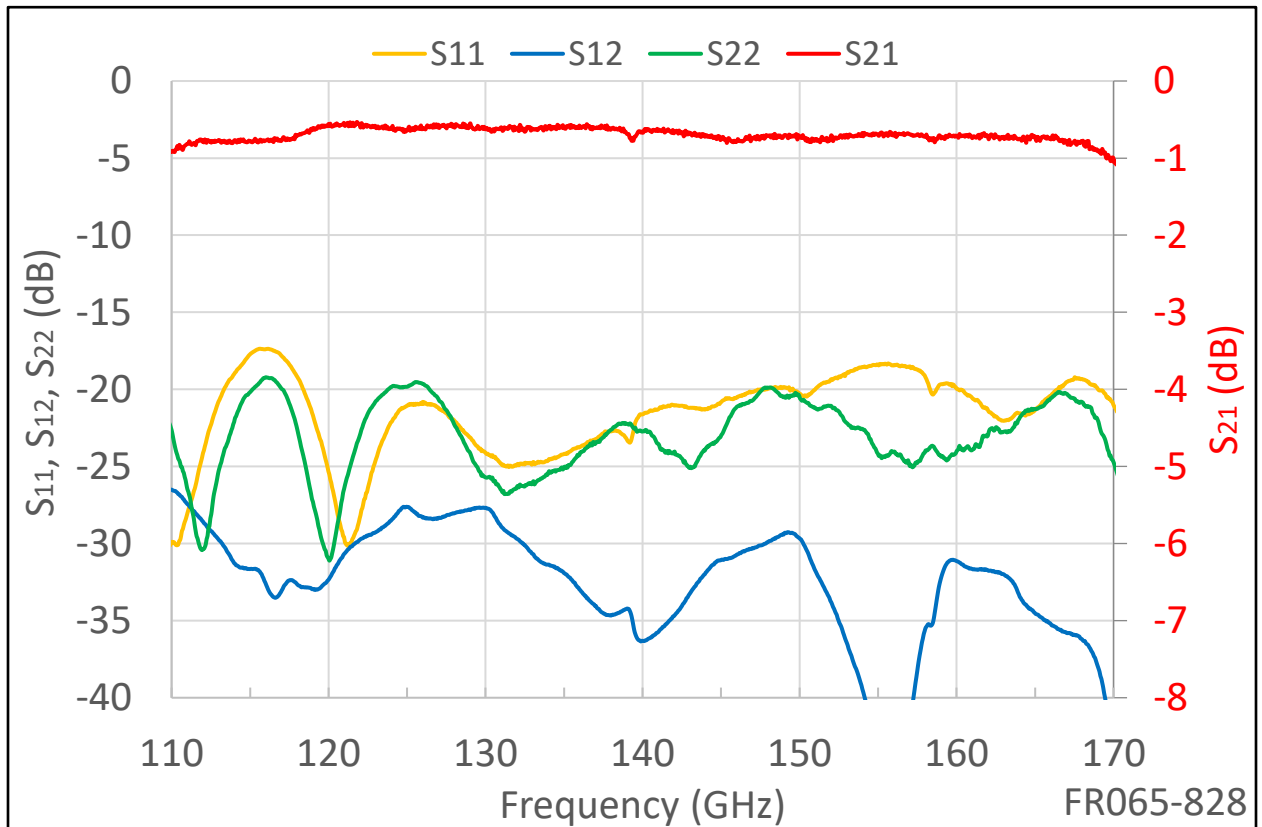

FR065

WR-6.5 waveguide isolator



MicroHarmonics

Superior mm-Wave Components

